Annual 2005
Groundwater Monitoring Report

Former Aboveground Diesel Tank Site
Samoa, California
Case No. 1NHU764

Prepared for:

Simpson Samoa Corporation
Arcata, California

Consulting Engineers & Geologists, Inc.
812 W. Wabash Avenue
Eureka, CA 95501-2138
707-441-8855

January 2006
000060

Reference: 000060

Annual 2005
Groundwater Monitoring Report

Former Aboveground Diesel Tank Site
Samoa, California
Case No. 1NHU764

Prepared for:

Simpson Samoa Corporation
Arcata, California

Prepared by:

Consulting Engineers & Geologists, Inc.
812 W. Wabash Avenue
Eureka, CA 95501-2138
707-441-8855

PROFESSIONAL GEOLOGIST
FRANS BARTON LOWMAN
No. 6705
CHG No. 665
Exp. 6/30/07
STATE OF CALIFORNIA

January 2006

QA/QC:MKF

Table of Contents

Appendices

List of Illustrations

Figures

Tables

Abbreviations and Acronyms

<	denotes a value that is "less than" the method detection limit
ft/ft	feet per foot
mV	millivolts
ppm	parts per million
ug/g	micrograms per gram
ug/L	micrograms per Liter
ASTs	Above Ground Storage Tanks
BGS	Below Ground Surface
BTEX	Benzene, Toluene, Ethylbenzene, and total Xylenes
DCO_2	Dissolved Carbon Dioxide
DIPE	Diisopropyl Ether
DO	Dissolved Oxygen
EC	Electrical Conductivity
EPA	(U.S.) Environmental Protection Agency
ETBE	Ethyl Tertiary-Butyl Ether
ETH	Ethanol
INS	Insufficient product for measurement
MSL	(feet above) Mean Sea Level
MTBE	Methyl Tertiary-Butyl Ether
MW-#	Monitoring Well-#
NA	Not Applicable
ND	Not Detected at the laboratory detection limit
NM	Not Measured
NR	Not Recorded
NS	Not Sampled
ORP	Oxidation-Reduction Potential
RWQCB	California Regional Water Quality Control Board, North Coast Region
SHN	SHN Consulting Engineers & Geologists, Inc.
SSC	Simpson Samoa Corporation
TAME	Tertiary-Amyl Methyl Ether
TPHD	Total Petroleum Hydrocarbons as Diesel
TPHG	Total Petroleum Hydrocarbons as Gasoline
WP-#	Well Point (Boring)-#

1.0 Introduction

This report presents the results of biannual groundwater monitoring and sampling activities conducted by SHN Consulting Engineers and Geologists, Inc. (SHN) during the second half of 2005, at the Simpson Samoa Corporation (SSC) facility. The SSC site is located in the community of Samoa in Humboldt County, California (Figure 1). SHN conducted the monitoring event on August 30, 2005.

This report is presented in 5 sections. This section introduces the reader to the site. Section 2.0 discusses the scope of work completed at the site during the third quarter 2005 monitoring event, including groundwater well sampling. Section 3.0 presents the results of the groundwater-monitoring program. Section 4.0 presents conclusions regarding the nature of the site, as well as recommendations for future activities. Section 5.0 presents a list of references cited.

1.1 Background

The subject site is the location of 2 former 10,000-gallon steel diesel Aboveground Storage Tanks (ASTs) previously used to fuel equipment and vehicles. The former ASTs were located in the northern portion of the SSC facility, as shown on the site plan included as Figure 2. In the fall of 1998, the 2 ASTs were removed from the facility. A site investigation was conducted by SHN on June 19, 2000, which included the drilling and sampling of 10 soil borings (borings WP-1 through WP-10), and the installation and sampling of 10 well points (well points WP-1 through WP-10). The analytical results from this investigation indicated the presence of petroleum hydrocarbon-impacted soil and groundwater in the vicinity of the former ASTs (SHN, 2000). The soil and groundwater analytical results are summarized in Appendix A, Tables A-1 and A-2. Based on the results of the June 2000 site investigation, SHN recommended that groundwater-monitoring wells be installed at the site, and a quarterly groundwater monitoring program be implemented.

On January 18 and 19, 2001, SHN supervised the installation of 5 groundwater-monitoring wells (SHN, 2001). Soil borings MW-1 through MW-5 were drilled and sampled in the area of the former ASTs utilizing a truck-mounted hollow stem auger rig. Each boring was subsequently converted into a groundwater monitoring well. Soil samples collected from each boring were analyzed for Total Petroleum Hydrocarbons as Diesel (TPHD), and as Gasoline (TPHG), Benzene, Toluene, Ethylbenzene, and total Xylenes (BTEX), and Methyl Tertiary-Butyl Ether (MTBE).

TPHD was detected in the soil samples collected from borings MW-2 and MW-5, at concentrations of 390 micrograms per gram (ug/g), and 8.4 ug/g, respectively. TPHD was not detected in any of the other soil samples collected. Toluene was detected in the soil samples collected from borings MW-1 and MW-5, at concentrations of 0.0056 ug/g and 0.0052 ug/g, respectively. No other BTEX components were detected in any of the soil samples submitted for laboratory analysis.

Groundwater samples were collected from monitoring wells MW-1 through MW-5 on January 25 and 26, 2001. Each groundwater sample was analyzed for TPHD, TPHG, BTEX, and MTBE. TPHD was detected in groundwater samples collected from monitoring wells MW-1 through MW-4, at concentrations ranging from 270 micrograms per Liter (ug/L) in monitoring well MW-1, to 4,700 ug/L in monitoring well MW-2. TPHD was not detected in the groundwater sample collected from monitoring well MW-5. TPHG was detected in the groundwater sample collected from monitoring

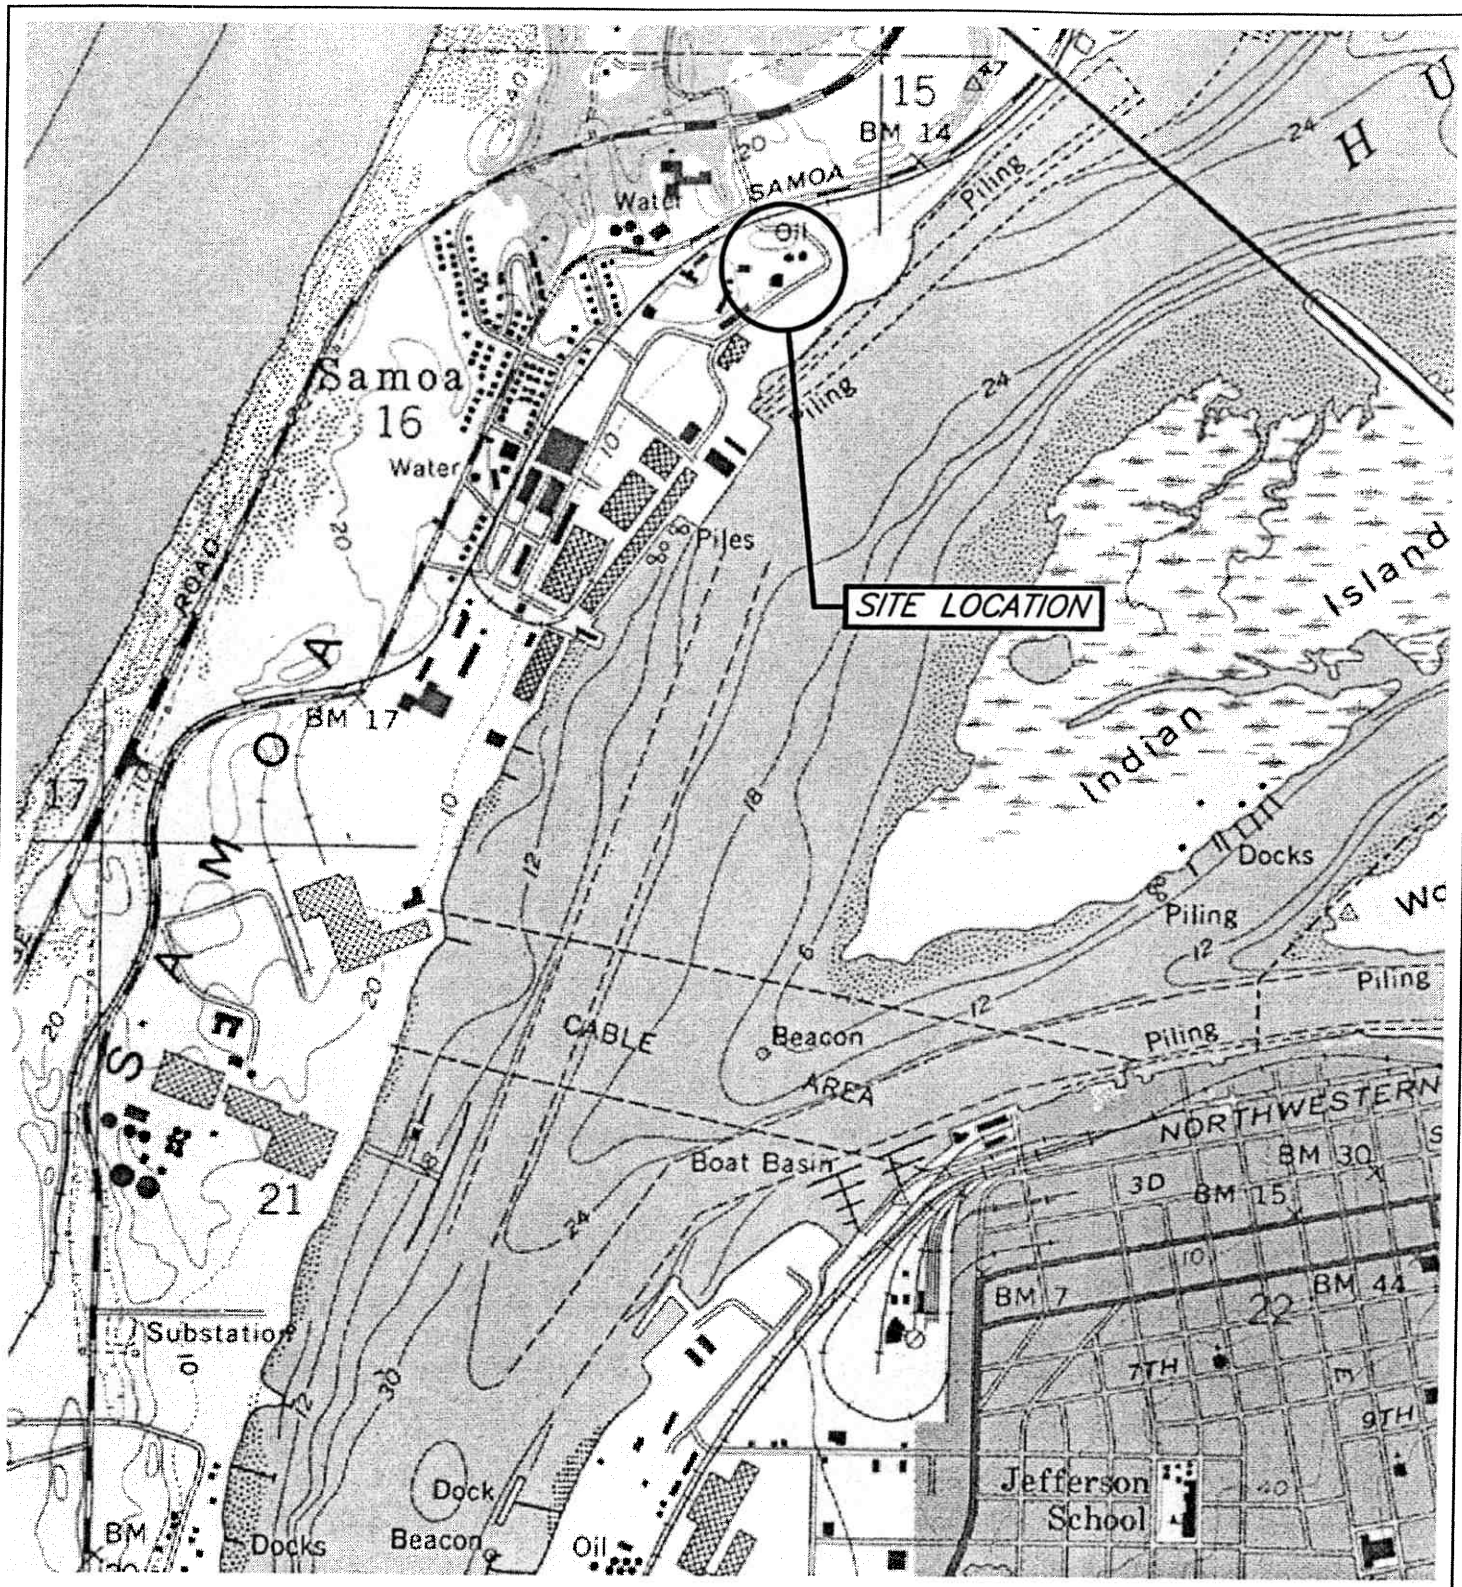

SOURCE: EUREKA USGS 7.5 MINUTE QUADRANGLE

SHN Consulting Engineers & Geologists, Inc.	Simpson Samoa Corporation Samoa Diesel AST Investigation Samoa, California	Site Location Map SHN 000060
	MARCH 2004	000060-location	Figure 1

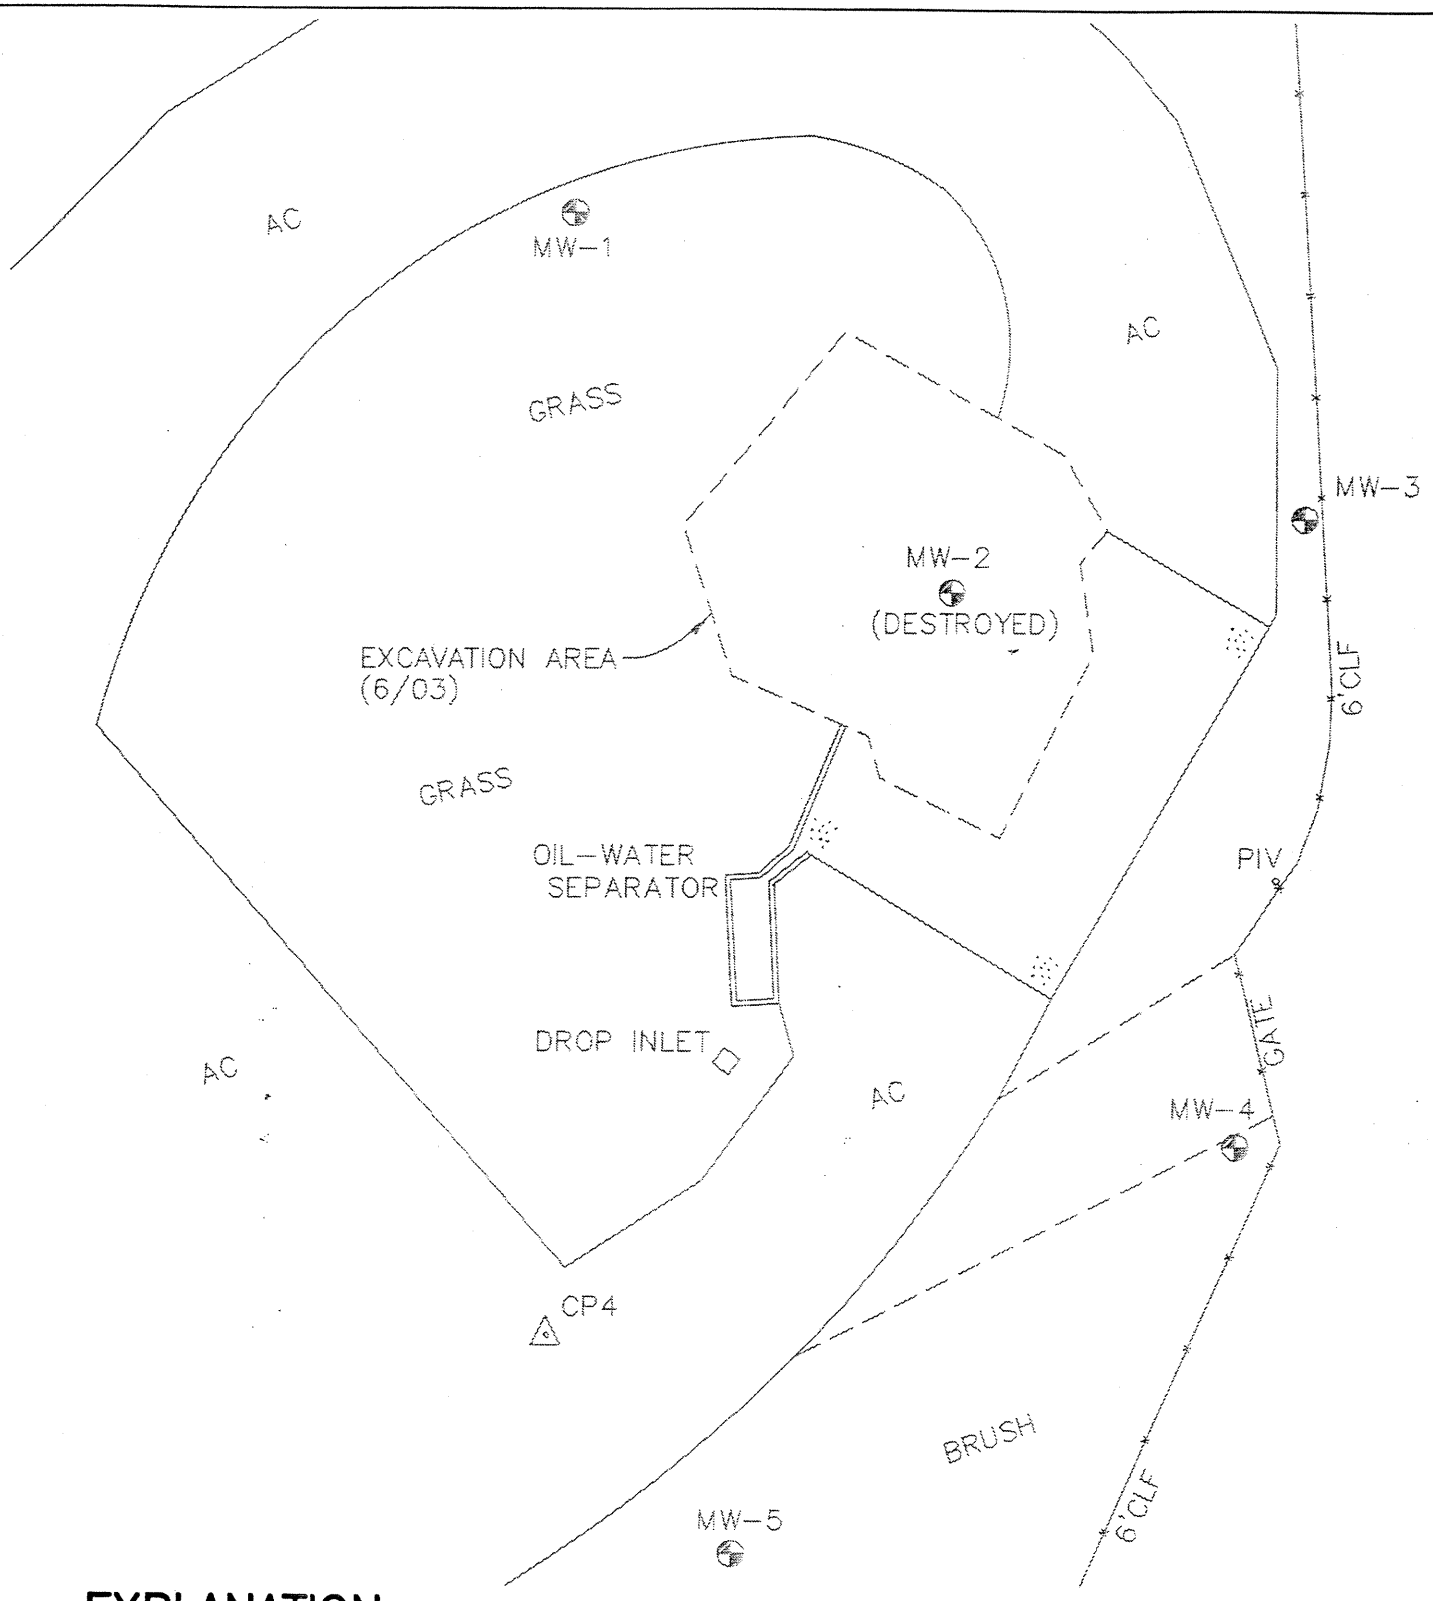

EXPLANATION

MW-3 *EXISTING MONITORING WELL LOCATION AND DESIGNATION*

N

1"=30'

SHN Consulting Engineers & Geologists, Inc.	Simpson Samoa Corporation Samoa Diesel AST Investigation Samoa, California	Site Plan SHN 000060	
	OCTOBER 2003	000060-SI1	Figure 2

well MW-2, at a concentration of 360 ug/L. TPHG was not detected in any of the other groundwater samples submitted for laboratory analysis. Based on these results, a quarterly monitoring program was implemented.

In a letter dated December 3, 2001, the RWQCB requested that the horizontal and vertical extent of soil and groundwater contamination in the area of the former ASTs be further characterized, as part of the long-range strategic plan for the site. During the second quarter of 2002, SHN observed the installation of 4 exploratory soil borings (WP-101 through WP-104) at the site, utilizing a truck-mounted Geoprobe® unit. One soil sample was collected from each soil boring and submitted for laboratory analyses. In addition, temporary well points were installed and sampled in each boring utilizing the Geoprobe® direct push system, for the purpose of collecting groundwater samples. Well point WP-101 was intended to assess groundwater conditions to the west of the former AST location. Well point WP-102 was intended to assess groundwater conditions northwest of the former AST location. Well point WP-103 was intended to assess groundwater conditions to the east of the former AST location. However, access in the area of this well point was limited due to the presence of large pieces of concrete rubble. Although well point WP-103 was placed close to the proposed location, it was not possible to access an additional location further east of that well point. Well point WP-104 was intended to assess groundwater conditions northeast of the former AST location.

Laboratory analyses of the soil samples collected indicated the presence of TPHD in boring WP-103, at a concentration of 5.0 ug/g. The laboratory noted that the material that was reported as TPHD contained material in the diesel range of molecular weights and beyond, suggesting the presence of oil heavier than diesel. TPHD was not detected in any of the other soil samples that were collected. No detectable concentrations of either BTEX components or MTBE were present in any of the soil samples that were submitted for laboratory analyses.

TPHD was detected in each groundwater sample collected, at concentrations ranging from 110 ug/L in well point WP-103, to 140 ug/L in well points WP-102 and WP-104. The analytical laboratory noted that the samples contained material that did not exhibit the peak pattern typical of diesel oil. No BTEX compounds or MTBE were detected in any of the groundwater samples that were submitted for laboratory analysis. Historic soil and groundwater analytical data are included in Appendix A, Tables A-1 and A-2, respectively.

Between May 30 and June 3, 2003, an estimated 684 tons of petroleum hydrocarbon-impacted soil were excavated from the SSC facility (SHN, 2003). Prior to commencing the excavation work, the concrete secondary containment structure used to hold the former ASTs was removed. Monitoring well MW-2, located within the excavated area, was subsequently destroyed during the soil removal activities. The well construction materials, including the well casing, screen and sand pack, were completely removed. Soil samples were collected from the excavation sidewalls to assess post-excavation subsurface conditions. It was originally proposed to collect soil samples from the floor of the excavation. However, by the time the soil removal work was completed, water had collected in the bottom 2 feet of the excavation. Approximately 35,000 gallons of water were subsequently pumped from the excavation into on-site holding tanks.

Upon completion of the soil removal activities, the excavation was backfilled to grade utilizing clean, imported fill material. Eight confirmation soil samples were collected from the sidewalls of

the excavated area for laboratory analysis. In addition, a water sample was collected from the holding tank containing water pumped from the excavation. TPHD was present in 7 of the 8 soil samples, at concentrations ranging from 1,000 ug/g to 25,000 ug/g. TPHD was also present in the water sample, at a concentration of 39,000 ug/L. BTEX components were not detected in any of the soil samples or the water sample submitted for analyses. The results from the investigation indicated that the lateral extent of petroleum hydrocarbon contamination was limited, and did not appear to be migrating.

On November 6, 2003, the RWQCB approved a revision to the current groundwater monitoring program to include a reduction in the sample parameters to be tested for, and to revise the monitoring plan from quarterly to semiannual.

Upon completion of soil excavation activities in June 2003, the RWQCB requested a groundwater sample be collected within the excavated area near the location of former monitoring well MW-2. SHN prepared a work plan dated March 3, 2004, to use well point technology to conduct the additional groundwater monitoring as requested by the RWQCB. The work plan was approved by the RWQCB in a letter dated March 15, 2004, with the request that an additional groundwater sample be collected below the level of the clean fill material.

On September 1, 2004, a direct-push well point (WP-201) was completed in the backfilled area of the site, adjacent to the former location of well MW-2 (Figure 2). The well point was completed in 2 stages. The first stage was intended to sample groundwater within the clean backfill material of the excavation, and the second stage was intended to sample groundwater beneath the clean backfill material. As part of the well point installation process, a hand auger boring was extended to a depth of 3.6 feet Below Ground Surface (BGS). The temporary well point and screen were then installed to a depth of 6 feet BGS using a protective drive casing.

Once the well point was set to the desired depth, the protective drive casing was retracted 3 feet to expose the screen from a depth of 3 feet to 6 feet BGS. A groundwater sample was then collected from the temporary well point. Upon completion of groundwater sampling at the 3-foot to 6-foot depth, the well point was driven to a depth of 9 feet BGS using the protective casing. The protective casing was then retracted 2.5 feet to expose the screen from a depth of 6.5 feet to 9 feet BGS. The well point was once again purged using a peristaltic pump, and sampled using a disposable polyethylene bailer. Laboratory analyses of the two groundwater samples revealed TPHD at a concentration of 24,000 ug/L in the shallow sample (excavation backfill), and 420 ug/L in the deeper sample (native material below the excavation backfill).

Biannual groundwater monitoring at the SSC facility is ongoing, as requested by the RWQCB.

1.2 Objective

The objective of the monitoring program is to assess current groundwater conditions beneath the site.

2.0 Field Activities

2.1 Monitoring Well Sampling

SHN conducted groundwater monitoring on August 30, 2005. As part of the monitoring program, wells MW-1, MW-3, MW-4, and MW-5 were purged and sampled. Prior to purging, each monitoring well was measured for depth to water, and checked for the presence of floating product (none was observed). Electrical Conductivity (EC), pH, and temperature were monitored periodically during purging activities using portable instrumentation. All 4 wells were also measured for Dissolved Oxygen (DO), Oxidation-Reduction Potential (ORP), and Dissolved Carbon Dioxide (DCO_2).

A groundwater sample was then collected from each well utilizing a disposable polyethylene bailer. The water samples were immediately placed in an ice-filled cooler, and submitted to the laboratory for analyses under appropriate chain-of-custody. Field data sheets from the August 30, 2005, groundwater-monitoring program are included in Appendix B.

2.2 Laboratory Analysis

Each groundwater sample was analyzed for TPHD, in general accordance with U.S. Environmental Protection Agency (EPA) Method Nos. 3510/GCFID/8015B.

North Coast Laboratories, Ltd., a State-certified analytical laboratory located in Arcata, California, conducted the groundwater sample analyses.

2.3 Equipment Decontamination Procedures

All monitoring and sampling equipment was cleaned prior to being transported to the site. All smaller equipment was initially washed in a water solution containing Liquinox® cleaner, followed by a distilled water rinse, then by a second distilled water rinse.

2.4 Investigation-Derived Waste Management

All rinse water utilized for decontaminating field-sampling equipment, and all purge water, was temporarily stored on site in 5-gallon buckets. The water was then transported to SHN's 1,000-gallon purge water storage tank located at 812 West Wabash Avenue in Eureka, California. Approximately 27 gallons of decontamination and purge water from the August 30, 2005, sampling event will be discharged, under permit, to the City of Eureka municipal sewer system. A discharge receipt will be provided once the disposal process has been completed. Appendix B contains the discharge receipt for the 26 gallons of wastewater generated during the previous (March 4, 2005), groundwater monitoring event.

3.0 Groundwater Monitoring Results

3.1 Hydrogeology

Depth-to-groundwater measurements were collected from each monitoring well prior to sampling, and are presented in Table 1.

Table 1
Groundwater Elevations, August 30, 2005
Simpson Samoa Former AST Site, Samoa, California

Sample Location	Top of Casing Elevation (feet MSL)[1]	Depth to Water (feet)[2]	Groundwater Elevation (feet MSL)
MW-1	14.74	6.52	8.22
MW-3	12.54	4.57	7.97
MW-4	12.24	4.37	7.87
MW-5	11.98	3.86	8.12

1. MSL: Mean Sea Level
2. Below top of casing

During this monitoring event, the direction of groundwater flow beneath the SSC site was to the southeast, with an approximate gradient of 0.002. A groundwater contour map for the August 30, 2005, monitoring event is presented as Figure 3. Historical groundwater elevation data are presented in Appendix A, Table A-3.

3.2 Groundwater Analytical Results

The laboratory analytical results for the groundwater samples collected on August 30, 2005, are summarized in Table 2.

Table 2
Groundwater Analytical Results, August 30, 2005
Simpson Samoa Former AST Site, Samoa, California
(in ug/L)[1]

Sample Location	TPHD[2]
MW-1	**68**[3]
MW-3	**1,200**[3]
MW-4	**380**[3]
MW-5	<50[4]

1. ug/L: micrograms per Liter
2. TPHD: Total Petroleum Hydrocarbons as Diesel, analyzed in general accordance with U.S. EPA Method Nos. 3510/GCFID/8015B.
3. Sample contains material similar to degraded or weathered diesel oil.
4. <: Denotes a value that is "less than" the method detection limit.

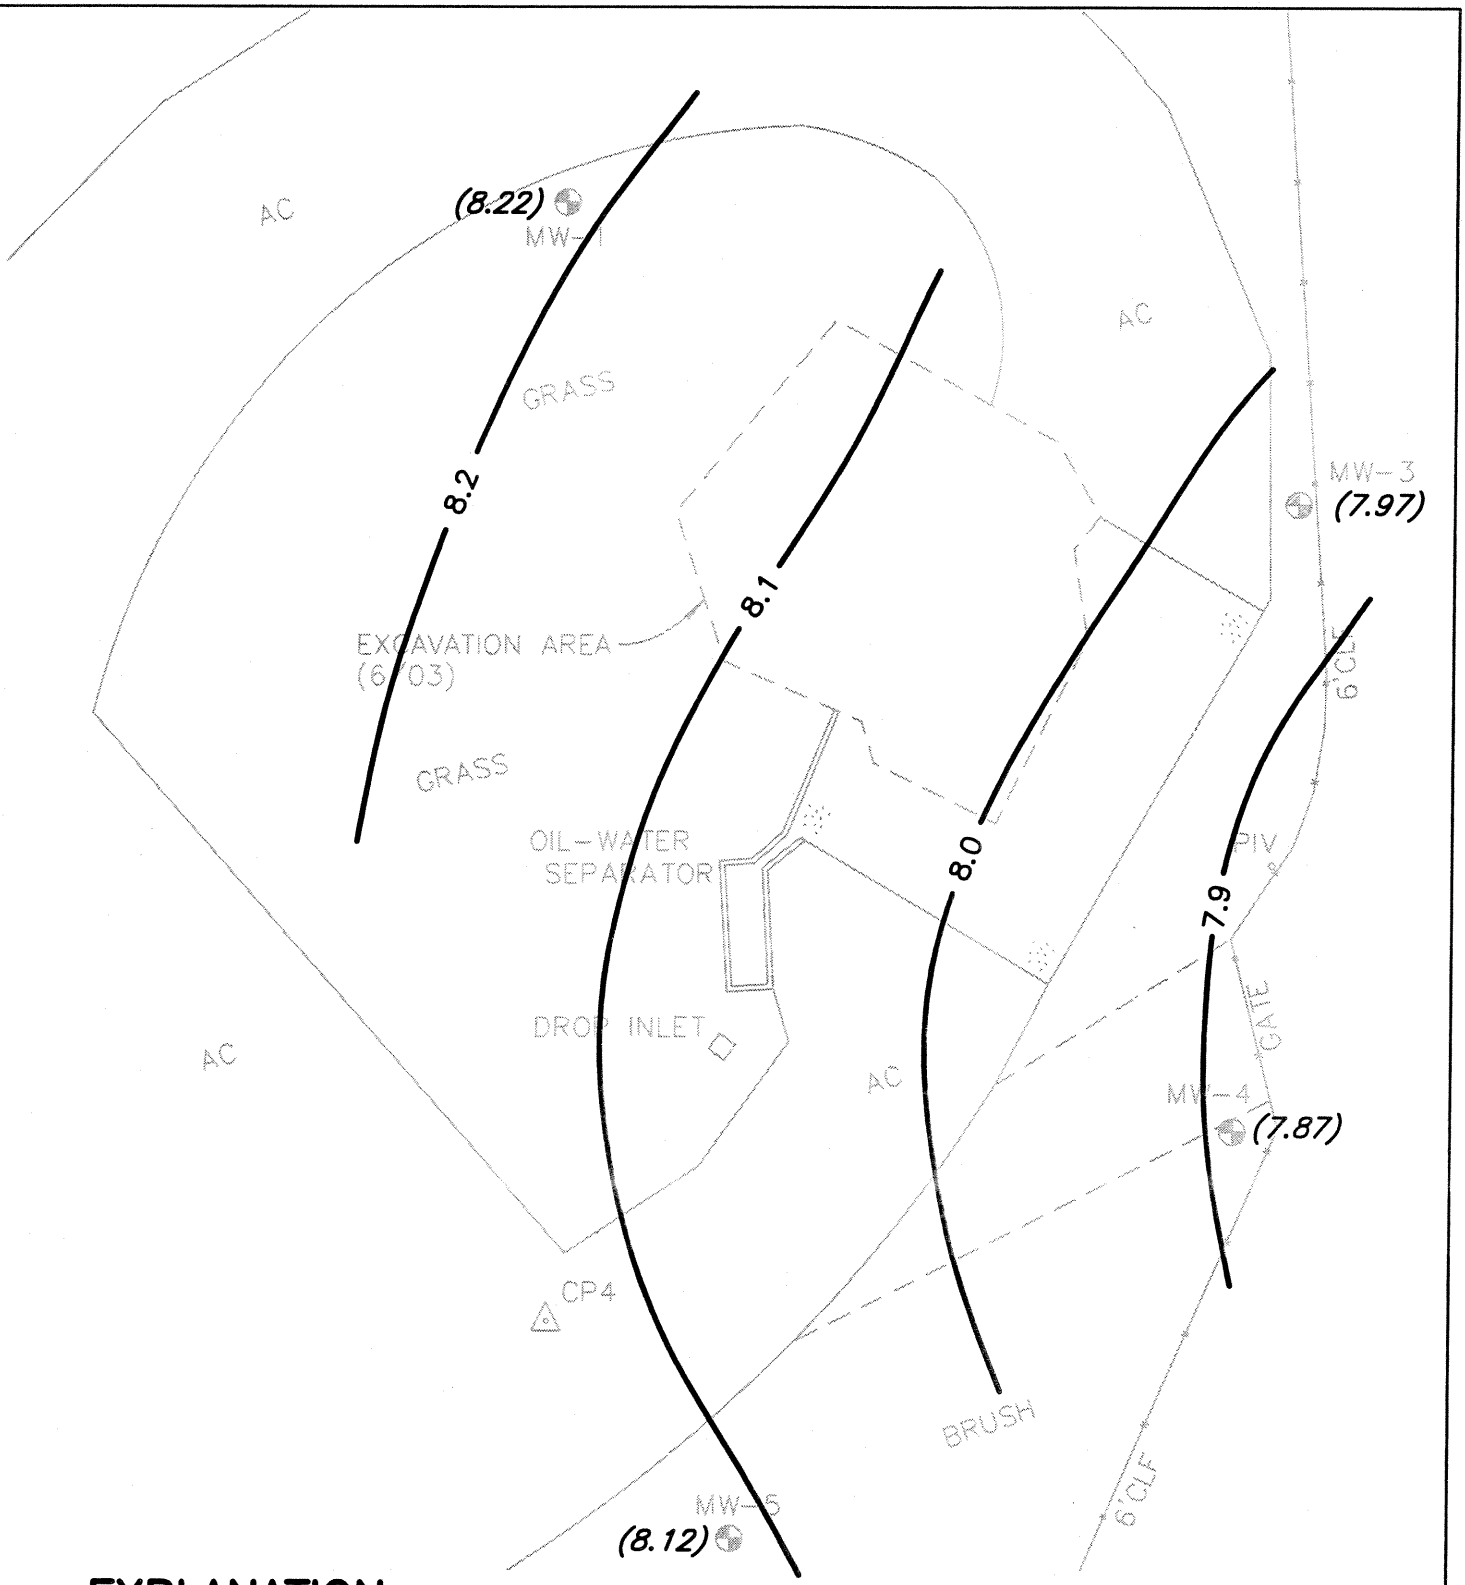

EXPLANATION

MW-3 — EXISTING MONITORING WELL LOCATION AND DESIGNATION

(7.97) — GROUNDWATER ELEVATION IN FEET ABOVE MSL

8.0 — CONTOUR OF EQUAL GROUNDWATER ELEVATION

N

1"=30'

SHN Consulting Engineers & Geologists, Inc.	Simpson Samoa Corporation Samoa Diesel AST Investigation Samoa, California		Groundwater Contours August 30, 2005 SHN 000060
	SEPTEMBER 2005	000060-GWC-AUG-2005	Figure 3

TPHD was detected in the groundwater samples collected from monitoring wells MW-1, MW-3, and MW-4, at concentrations of 68, 1,200, and 380 ug/L, respectively. TPHD was not present above the laboratory method detection limit in the groundwater sample collected from well MW-5. The complete laboratory test results, QA/QC data, and corresponding chain-of custody documentation are included in Appendix C. The TPHD concentrations in existing wells on August 30, 2005, are shown on Figure 4. Historic groundwater monitoring data are presented in Appendix A, Table A-2.

3.3 Natural Attenuation Parameters

DO, DCO_2, and ORP were measured in each groundwater monitoring well prior to sampling, and are summarized in Table 3. During the August 30, 2005, monitoring event, DO concentrations ranged from 0.76 parts per million (ppm) in well MW-4, to 1.64 ppm in well MW-3. These DO concentrations are marginally sufficient to support biodegradation. DCO_2 concentrations ranged from 50 ppm in well MW-5, to 200 ppm in well MW-1, and indicate that biodegradation may be occurring at the site. ORP measurements ranged from –42 millivolts (mV) in well MW-1, to -110 mV in well MW-3. These measurements indicate that mildly reducing conditions exist at the site. Historic DO, DCO_2, and ORP measurement results are included in Appendix A, Table A-4.

Table 3
DO, DCO_2, and ORP Measurement Results, August 30, 2005
Simpson Samoa Former AST Site, Samoa, California

Sample Location	DO[1] (ppm)[2]	DCO_2[3] (ppm)	ORP[4] (mV)[5]
MW-1	1.23	200	-42
MW-3	1.64	90	-110
MW-4	0.76	80	-100
MW-5	0.77	50	-100

1. DO: Dissolved Oxygen, field measured using portable instrumentation
2. ppm: Measurement concentration, in parts per million
3. DCO_2: Dissolved Carbon Dioxide, field measured using a field test kit
4. ORP: Oxidation-Reduction Potential measured using portable instrumentation
5. mV: millivolts

4.0 Discussion and Recommendations

The results of this and previous groundwater monitoring events indicate that the TPHD present in groundwater beneath the site appears to be limited in extent, primarily in the former excavation pit. The groundwater gradient beneath the site is very shallow. Although detectable TPHD concentrations are present in the former excavation area, it does not appear that significant migration of petroleum hydrocarbons is occurring. Since the completion of the June 2003 excavation program, TPHD concentrations in well MW-3 have demonstrated a general decreasing trend. The TPHD concentrations in wells MW-3 (1,200 ug/L) and MW-4 (380 ug/L) were slightly higher during this sampling event, when compared to those reported during the previous event (660 and 210 ug/L), respectively.

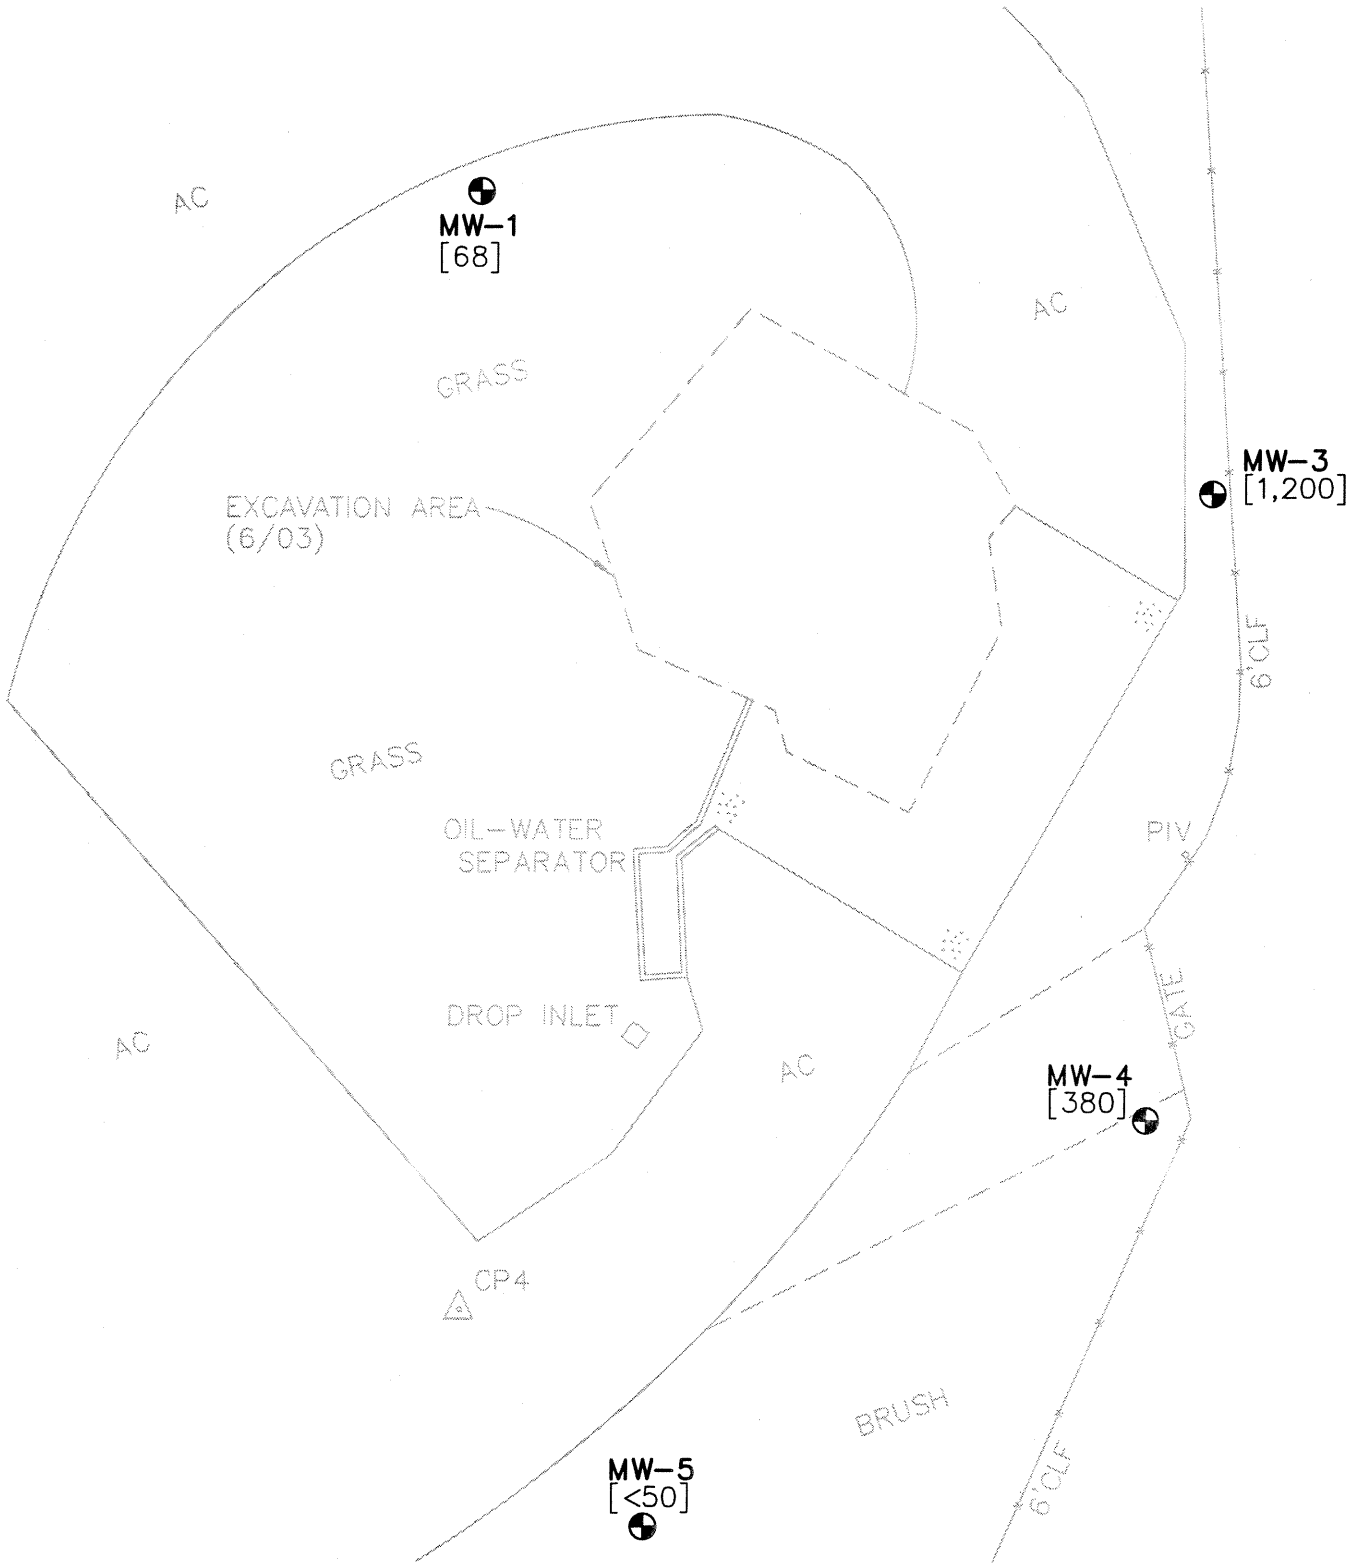

EXPLANATION

MW-5 — *EXISTING MONITORING WELL LOCATION AND DESIGNATION*

[<50] — *TPHD CONCENTRATION IN GROUNDWATER, IN ug/L.*

N

1"=30'

SHN Consulting Engineers & Geologists, Inc.	Simpson Samoa Corporation Samoa Diesel AST Investigation Samoa, California		TPHD Concentrations in Groundwater, August 30, 2005 SHN 000060
	SEPTEMBER 2005	000060-TPHD-AUG-2005	Figure 4

Figure 5 shows the TPHD concentrations in monitoring wells MW-3 and MW-4 over time. Both wells show decreasing concentrations of TPHD. Approximately 684 tons of petroleum hydrocarbon-impacted soil, and 35,000 gallons of petroleum hydrocarbon-impacted groundwater were removed from the former AST area during the excavation program conducted in June 2003. Using the petroleum hydrocarbon concentrations in the removed material, this translates into the removal of approximately 2,270 gallons of diesel fuel product.

Figure 5
TPHD Concentration over Time, Wells MW-3 and MW-4
Simpson Samoa Corporation Former AST Location

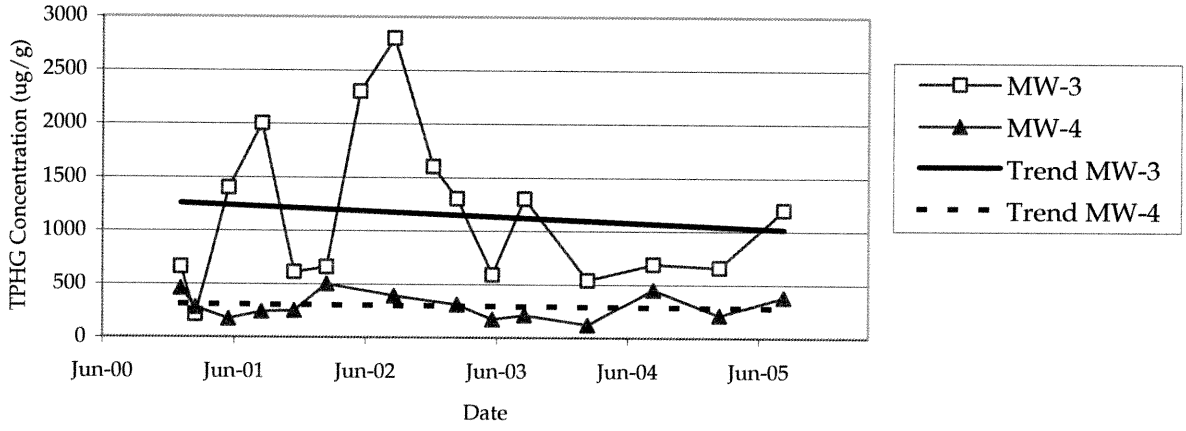

To further evaluate the long-term trends of petroleum hydrocarbons in groundwater, an extrapolation of TPHD trends was conducted using: 1) all of the TPHD data collected from wells MW-3 and MW-4, and 2) the TPHD data collected from wells MW-3 and MW-4 after the site was excavated in June 2003.

An extrapolation of TPHD trend for all data collected is shown in Figure 6. The trend shown for data collected from monitoring well MW-3 indicates that THPD concentrations would decrease to levels below the method detection limit (50 ug/L) in less than 30 years. The groundwater data from monitoring well MW-4 indicates that low concentration petroleum hydrocarbons are present in this area at concentrations that are relatively stable over time.

Figure 6
Predicted TPHD Concentration over Time, Wells MW-3 and MW-4
Simpson Samoa Corporation Former AST Location

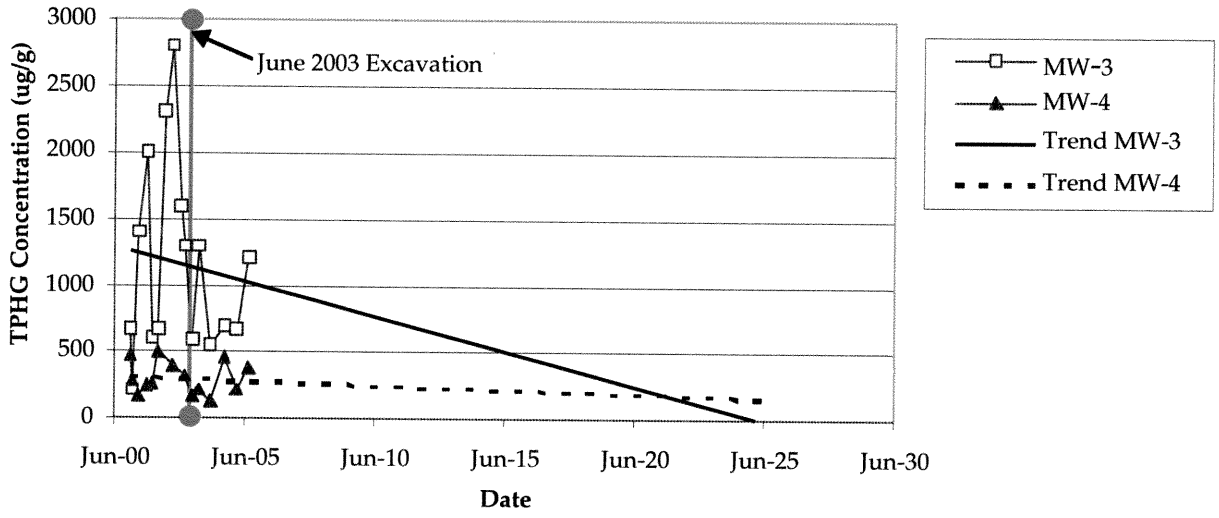

An extrapolation of TPHD concentrations over time in wells MW-3 and MW-4 since the June 2003 excavation is presented in Figure 7. Using the post-2003 excavation data, the overall concentration trend in well MW-3 is decreasing, however at a slower rate than that shown in Figure 6, indicating a longer time period for water quality objectives to be met. Using the trend slope shown in Figure 7 along with the highest TPHD concentration found in well MW-3 since the June 2003 excavation program, an extrapolation of expected TPHD concentrations over time was made. This extrapolation is shown in Figure 7, and indicates that TPHD concentrations in well MW-3 would drop below 1,000 ug/L in less than 25 years, and would drop below 800 ug/L in less than 40 years.

When comparing the TPHD concentration trends observed in Figures 6 and 7, it is apparent that the June 2003 excavation/dewatering program was effective in the removal of elevated concentrations of TPHD-impacted soil and groundwater. Although the TPHD concentration trend observed for data collected since the 2003 field program is flatter than that observed for all data (Figure 6), the average TPHD concentrations found in well MW-3 are significantly less (830 ug/L), when compared to those found prior to the 2003 field program (1,354 ug/L).

In order to confirm the overall decreasing concentration trend, SHN will continue semiannual monitoring of wells MW-1, MW-3, MW-4, and MW-5, in accordance with RWQCB Monitoring and Reporting Program RI-2003-0129. Groundwater samples collected during the next monitoring event will be analyzed using a silica gel cleanup in order to remove any non-petroleum hydrocarbons that may be present. The next groundwater-monitoring event is scheduled for March 2006. The March 2006 data will be used to evaluate future site activities.

Figure 7
TPHD Concentrations vs Time Since June 2003 Excavation
Simpson Samoa AST, Samoa, California

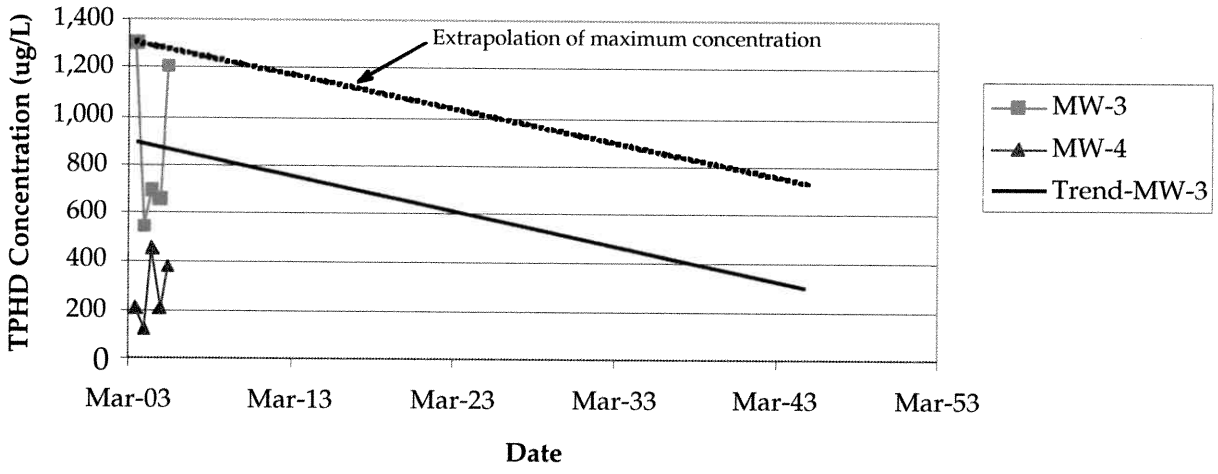

5.0 References Cited

SHN Consulting Engineers & Geologists, Inc. (August 2000). *Preliminary Site Investigation Report of Findings, Above Ground Diesel Storage Tank, Simpson Samoa Corporation, Samoa Facility, Samoa, California, RWQCB Case No. 1NHU764.* Eureka: SHN.

---. (February 2001). *Monitoring Well Installation Report of Findings Simpson Former Above Ground Diesel Storage Tank Investigation Samoa, California.* Eureka: SHN.

---. (October 2003). *Soil Excavation Report of Findings, Former Diesel Aboveground Tank Site, Simpson Samoa Corporation, Samoa Facility, Samoa, California.* Eureka: SHN.

Appendix A

Historic Monitoring Data

Table A-1
Historic Soil Analytical Results
Simpson Samoa Former AST Site, Samoa, California
(in ug/g)[1]

Sample Location	Date	TPHD[2]	B[3]	T[3]	E[3]	X[3]	MTBE[4]
WP-1	6/19/2000	**1.5**	<0.005[5]	<0.005	<0.005	<0.005	<0.05
WP-2	6/19/2000	**12**	<0.005	<0.005	<0.005	<0.005	<0.05
WP-3	6/19/2000	**6,100**	<0.5	<0.5	<0.5	<0.5	<5.0
WP-4	6/19/2000	**1,700**	<0.5	<0.5	<0.5	<0.5	<5.0
WP-5	6/19/2000	**78**	<0.005	<0.005	<0.005	<0.005	<0.05
WP-6	6/19/2000	**2.1**	<0.005	<0.005	<0.005	<0.005	<0.05
WP-7	6/19/2000	**37**	<0.005	**0.015**	<0.005	<0.005	<0.05
WP-8	6/19/2000	**5.4**	<0.005	<0.005	<0.005	**0.0066**	<0.05
WP-9	6/19/2000	**1.1**	<0.5	<0.5	<0.5	**1.72**	<5.0
WP-10	6/19/2000	**5**	**0.013**	**0.0052**	<0.005	<0.005	<0.05
MW-1 4-6	1/18/2001	<1.0	<0.005	**0.0056**	<0.005	<0.005	<0.050
MW-2 5.0	1/19/2001	**390**	<0.005	<0.005	<0.08	<0.02	<0.050
MW-3 4-6	1/18/2001	<1.0	<0.005	<0.005	<0.005	<0.005	<0.050
MW-4 4-6	1/19/2001	<1.0	<0.005	<0.005	<0.005	<0.005	<0.050
MW-5 4-6	1/19/2001	**8.4**	<0.005	**0.0052**	<0.005	**0.0062**	<0.050
WP-101@6'	6/12/2002	<1.0	<0.005	<0.005	<0.005	<0.005	<0.05
WP-102@6.5'	6/12/2002	<1.0	<0.005	<0.005	<0.005	<0.005	<0.05
WP-103@3'	6/12/2002	**5**	<0.005	<0.005	<0.005	<0.005	<0.05
WP-104@4'	6/12/2002	<1.0	<0.005	<0.005	<0.005	<0.005	<0.05
EP-1	6/3/2003	**1,000**	<0.005	<0.005	<0.005	<0.005	<0.05
EP-2	6/3/2003	**15,000**	<0.005	<0.005	<0.005	<0.005	<0.05
EP-3	6/3/2003	**5,900**	<0.005	<0.005	<0.005	<0.005	<0.05
EP-4	6/3/2003	**13,000**	<0.005	<0.005	<0.005	<0.005	<0.05
EP-5	6/3/2003	<1.0	<0.005	<0.005	<0.005	<0.005	<0.05
EP-6	6/3/2003	**25,000**	<0.005	<0.005	<0.005	<0.005	<0.05
EP-7	6/3/2003	**7,000**	<0.005	<0.005	<0.005	<0.005	<0.05
EP-8	6/3/2003	**8,700**	<0.005	<0.005	<0.005	<0.005	<0.05
SP-1/SP-2[6]	6/3/2003	**9,700**	<0.005	<0.005	<0.005	<0.005	<0.05
SP-3/SP-4[6]	6/3/2003	**25,000**	<0.005	<0.005	<0.005	<0.005	<0.05
SP-5/SP-6[6]	6/3/2003	**20,000**	<0.005	<0.005	<0.005	<0.005	<0.05
SP-7/SP-8[6]	6/3/2003	**5,600**	<0.005	<0.005	<0.005	<0.005	<0.05

1. ug/g: micrograms per gram
2. TPHD: Total Petroleum Hydrocarbons as Diesel
3. BTEX: Benzene, Toluene, Ethylbenzene, and total Xylenes
4. MTBE: Methyl Tertiary-Butyl Ether
5. <: Denotes a laboratory value that is "less than" the method detection limit.
6. Composite sample

Table A-2
Historic Groundwater Analytical Results
Simpson Samoa Former AST Site, Samoa, California
(in ug/L)[1]

Sample Location	Sample Date	TPHG[2]	TPHD[3]	B[4]	T[4]	E[4]	X[4]	MTBE[5]	ETH[6]	Fuel Oxygenates[7]
WP-1	6/19/00	NS[8]	**510**	<0.5[9]	<0.5	<0.5	<0.5	<3.0	NS	NS
WP-2	6/19/00	NS	**3,100**	<1.0	<1.0	<1.0	<1.0	<6.0	NS	NS
WP-3	6/19/00	NS	**11,000**	<2.5	<2.5	<2.5	<2.5	<15	NS	NS
WP-4	6/19/00	NS	**1,100**	<0.5	<0.5	<0.5	<0.5	<3.0	NS	NS
WP-5	6/19/00	NS	**480**	<0.5	<0.5	<0.5	<0.5	**3.3**	NS	NS
WP-6	6/19/00	NS	**2,000**	<1.0	<1.0	<1.0	<1.0	**11**	NS	NS
WP-7	6/19/00	NS	**360**	<0.5	<0.5	<0.5	<0.5	**7.7**	NS	NS
WP-9	6/19/00	NS	**76**	<0.5	<0.5	<0.5	<0.5	<3.0	NS	NS
WP-10	6/19/00	NS	**170**	<0.5	<0.5	<0.5	<0.5	<3.0	NS	NS
Tank	6/3/03	NS	**39,000**	<0.50	<0.50	<0.50	<0.50	NS	NS	NS
MW-1	1/25/01	<50	**270**	<0.50	<0.50	<0.50	<0.50	<0.50	<5.0	NS
	3/7/01	<50	**130**	<0.50	<0.50	<0.50	<0.50	<0.50	NS	ND[10]
	6/7/01	<50	**160**	<0.50	<0.50	<0.50	<0.50	<0.50	NS	ND
	9/6/01	<50	**73**	<0.50	<0.50	<0.50	<0.50	<0.50	<500	ND
	12/6/01	<50	**100**	<0.50	<0.50	<0.50	<0.50	<0.50	<5.0	ND except Methanol: 61
	3/6/02	<50	**110**	<0.50	<0.50	<0.50	<0.50	<0.50	<5.0	ND
	9/10/02	<50	**190**	<0.50	<0.50	<0.50	<0.50	<3.0	NS	NS
	3/4/03	<50	**95**	<0.50	<0.50	<0.50	<0.50	<3.0	NS	NS
	6/11/03	<50	**68**	<0.50	<0.50	<0.50	<0.50	<3.0	NS	NS
	9/8/03	<50	**120**	<0.50	<0.50	<0.50	<0.50	<3.0	NS	NS
	3/2/04	NS	<50	NS	NS	NS	NS	NS	NS	NS
	9/1/04	NS	**200**	NS	NS	NS	NS	NS	NS	NS
	3/4/05	NS	<50	NS	NS	NS	NS	NS	NS	NS
	8/30/05	NS	**68**	NS	NS	NS	NS	NS	NS	NS
MW-2	1/26/01	**360**	**4,700**	<0.50	**0.61**	<0.50	**1**	<0.50	<5.0	NS
	3/7/01	**210**	**2,900**	<0.50	<0.50	<0.50	**1.8**	<0.50	NS	ND
	6/7/01	<250	**3,300**	<1.3	<1.3	<1.3	<1.3	<1.3	NS	ND
	9/6/01	**450**	**12,000**	<1.0	<1.0	<1.0	<1.0	<1.0	<1,000	ND
	12/6/01	NS	NS	NS	NS	NS	NS	NS	NS	NS
	3/6/02	NS	NS	NS	NS	NS	NS	NS	NS	NS
	9/10/02	**490**	**18,000**	<0.50	<0.50	<0.50	<0.50	<3.0	NS	NS
	3/4/03	**380**	**12,000**	<0.50	<0.50	<0.50	<0.50	<3.0	NS	NS
Well MW-2 Destroyed 6/2/03										
MW-3	1/25/01	<50	**660**	<0.50	**1.4**	<0.50	<0.50	<0.50	**15**	NS
	3/7/01	<50	**210**	<0.50	<0.50	<0.50	<0.50	<0.50	NS	ND
	6/7/01	<250	**1,400**	<1.3	<1.3	<1.3	<1.3	**8.6**	NS	ND

Table A-2
Historic Groundwater Analytical Results
Simpson Samoa Former AST Site, Samoa, California
(in ug/L)[1]

Sample Location	Sample Date	TPHG[2]	TPHD[3]	B[4]	T[4]	E[4]	X[4]	MTBE[5]	ETH[6]	Fuel Oxygenates[7]
MW-3	9/6/01	<200	**2,000**	<1.0	<1.0	<1.0	<1.0	**7.9**	<1,000	ND
(cont'd)	12/6/01	<200	**610**	<1.0	<1.0	<1.0	<1.0	**4.9**	<5.0	ND
	3/6/02	<200	**660**	<1.0	<1.0	<1.0	<1.0	**2.8**	<5.0	ND
	6/7/02	**93**	**2,300**	<0.50	<0.50	<0.50	<0.50	**2.5**	NS	ND
	9/10/02	**160**	**2,800**	<0.50	<0.50	<0.50	<0.50	<3.0	NS	NS
	12/27/02	**86**	**1,600**	<0.50	<0.50	<0.50	<0.50	<3.0	NS	NS
	3/4/03	**84**	**1,300**	<0.50	<0.50	<0.50	<0.50	<3.0	NS	NS
	6/11/03	<50	**590**	<0.50	<0.50	<0.50	<0.50	<3.0	NS	NS
	9/8/03	**74**	**1,300**	<0.50	<0.50	<0.50	<0.50	<3.0	NS	NS
	3/2/04	NS	**540**	NS	NS	NS	NS	NS	NS	NS
	9/1/04	NS	**690**	NS	NS	NS	NS	NS	NS	NS
	3/4/05	NS	**660**	NS	NS	NS	NS	NS	NS	NS
	8/30/05	NS	**1,200**	NS	NS	NS	NS	NS	NS	NS
MW-4	1/26/01	<50	**460**	<0.50	<0.50	<0.50	<0.50	**4.4**	<5.0	NS
	3/7/01	<50	**280**	<0.50	<0.50	<0.50	<0.50	**5**	NS	ND
	6/7/01	<100	**170**	<0.50	<0.50	<0.50	<0.50	**2.6**	NS	ND
	9/6/01	<50	**240**	<0.50	<0.50	<0.50	<0.50	**2.5**	<500	ND
	12/6/01	<200	**250**	<1.0	<1.0	<1.0	<1.0	**2.7**	<5.0	ND
	3/6/02	<200	**500**	<1.0	<1.0	<1.0	<1.0	**6.4**	<5.0	ND
	9/10/02	<50	**390**	<0.50	<0.50	<0.50	<0.50	<3.0	NS	NS
	3/4/03	<50	**310**	<0.50	<0.50	<0.50	<0.50	<3.0	NS	NS
	6/11/03	<50	**170**	<0.50	<0.50	<0.50	<0.50	<3.0	NS	NS
	9/8/03	<50	**210**	<0.50	<0.50	<0.50	<0.50	**3**	NS	NS
	3/2/04	NS	**120**	NS	NS	NS	NS	NS	NS	NS
	9/1/04	NS	**450**	NS	NS	NS	NS	NS	NS	NS
	3/4/05	NS	**210**	NS	NS	NS	NS	NS	NS	NS
	8/30/05	NS	**380**	NS	NS	NS	NS	NS	NS	NS
MW-5	1/26/01	<50	<50	<0.50	<0.50	<0.50	<0.50	<0.50	<5.0	NS
	3/7/01	<50	<50	<0.50	<0.50	<0.50	<0.50	<0.50	NS	ND
	6/7/01	<50	<50	<0.50	**0.96**	<0.50	<0.50	<0.50	NS	ND
	9/6/01	<50	<50	<0.50	**0.50**	<0.50	<0.50	<0.50	<500	ND
	12/6/01	<50	<50	<0.50	<0.50	<0.50	<0.50	<0.50	<5.0	ND
	3/6/02	<50	**66**	<0.50	<0.50	<0.50	<0.50	<0.50	<5.0	ND
	9/10/02	<50	<50	<0.50	<0.50	<0.50	<0.50	<3.0	NS	NS
	3/4/03	<50	150	<0.50	<0.50	<0.50	<0.50	<3.0	NS	NS
	6/11/03	<50	150	<0.50	<0.50	<0.50	<0.50	<3.0	NS	NS

Table A-2
Historic Groundwater Analytical Results
Simpson Samoa Former AST Site, Samoa, California
(in ug/L)[1]

Sample Location	Sample Date	TPHG[2]	TPHD[3]	B[4]	T[4]	E[4]	X[4]	MTBE[5]	ETH[6]	Fuel Oxygenates[7]
MW-5 (cont'd)	9/8/03	<50	<50	<0.50	<0.50	<0.50	<0.50	<3.0	NS	NS
	3/2/04	NS	**81**	NS	NS	NS	NS	NS	NS	NS
	9/1/04	NS	**51**	NS	NS	NS	NS	NS	NS	NS
	3/4/05	NS	<50	NS	NS	NS	NS	NS	NS	NS
	8/30/05	NS	<50	NS	NS	NS	NS	NS	NS	NS
WP-101	6/12/02	NS	**120**	<0.5	<0.5	<0.5	<0.5	<3.0	NS	NS
WP-102	6/12/02	NS	**140**	<0.5	<0.5	<0.5	<0.5	<3.0	NS	NS
WP-103	6/12/02	NS	**110**	<0.5	<0.5	<0.5	<0.5	<3.0	NS	NS
WP-104	6/12/02	NS	**140**	<0.5	<0.5	<0.5	<0.5	<3.0	NS	NS
WP-201@ 3'-6'	9/1/04	NS	**24,000**	NS	NS	NS	NS	NS	NS	NS
WP-201@ 6'-9'	9/1/04	NS	**420**	NS	NS	NS	NS	NS	NS	NS

1. ug/L: micrograms per Liter
2. TPHG: Total Petroleum Hydrocarbons as Gasoline, analyzed in general accordance with U.S. Environmental Protection Agency (EPA) Method No. 8260B
3. TPHD: Total Petroleum Hydrocarbons as Diesel, analyzed in general accordance with EPA Method No. 3510
4. BTEX: Benzene, Toluene, Ethylbenzene, and Xylenes, analyzed in general accordance with EPA Method No. 8260B
5. MTBE: Methyl Tertiary-Butyl Ether, analyzed in general accordance with EPA Method No. 8260B
6. ETH: Ethanol, analyzed in accordance with EPA Method No. 8260B
7. Fuel oxygenates: Diisopropyl Ether (DIPE), Ethyl Tertiary-Butyl Ether (ETBE), Tertiary-Amyl Methyl Ether (TAME), Tertiary-Butyl Alcohol, methanol, and ethanol, analyzed in general accordance with EPA Method No. 8260B
8. NS: Not Sampled
9. <: Denotes a value that is "less than" the method detection limit.
10. ND: Not present at the laboratory detection limit

Table A-3
Historic Groundwater Elevation Data, Quarterly Sampling
Simpson Samoa Former AST Site, Samoa, California

Sample Location	Sample Date	Top of Casing Elevation (feet MSL)[1]	Depth to Water[2] (feet)	Groundwater Elevation (feet MSL)
MW-1	2/9/01	14.74	6.94	7.8
	3/7/01		6.35	8.39
	4/6/01		6.79	7.95
	5/7/01		7.13	7.61
	6/7/01		7.41	7.33
	7/16/01		7.68	7.06
	8/6/01		7.84	6.9
	9/6/01		8	6.74
	10/5/01		8.11	6.63
	11/6/01		8.13	6.61
	12/6/01		6.44	8.3
	2/8/02		4.6	10.14
	3/6/02		4.52	10.22
	6/7/02		5.89	8.85
	9/10/02		7.21	7.53
	12/27/02		4.85	9.89
	3/4/03		4.01	10.73
	6/11/03		4.78	9.96
	9/8/03		6.27	8.47
	3/2/04		3.76	10.98
	9/1/04		7.07	7.67
	3/4/05		4.59	10.15
	8/30/05		6.52	8.22
MW-2	2/9/01	12.64	5.02	7.62
	3/7/01		4.51	8.13
	4/6/01		4.91	7.73
	5/7/01		5.27	7.37
	6/7/01		5.54	7.1
	7/16/01		5.77	6.87
	8/6/01		5.97	6.67
	9/6/01		6.53	6.11
	10/5/01		(5.76)/NM[3]	NA[4]
	11/6/01		(5.60)/9.43	NA
	12/6/01		(4.62)/6.57	NA
	2/8/02		3.08	9.56
	3/6/02		NM	NA
	6/7/02		4.38	8.26
	9/10/02		5.51	7.13
	12/27/02		3.76	8.88
	3/4/03		2.22	10.42
Well MW-2 Destroyed 6/2/03				

Table A-3
Historic Groundwater Elevation Data, Quarterly Sampling
Simpson Samoa Former AST Site, Samoa, California

Sample Location	Sample Date	Top of Casing Elevation (feet MSL)[1]	Depth to Water[2] (feet)	Groundwater Elevation (feet MSL)
MW-3	2/9/01	12.54	4.57	7.97
	3/7/01		4	8.54
	4/6/01		4.59	7.95
	5/7/01		4.98	7.56
	6/7/01		5.28	7.26
	7/16/01		5.54	7
	8/6/01		5.74	6.8
	9/6/01		5.89	6.65
	10/5/01		5.99	6.55
	11/6/01		5.98	6.56
	12/6/01		3.95	8.59
	2/8/02		2.65	9.89
	3/6/02		2.65	9.89
	6/7/02		4.13	8.41
	9/10/02		5.28	7.26
	12/27/02		2.81	9.73
	3/4/03		2.13	10.41
	6/11/03		3.03	9.51
	9/8/03		4.33	8.21
	3/2/04		1.99	10.55
	9/1/04		5.09	7.45
	3/4/05		3.01	9.53
	8/30/05		4.57	7.97
MW-4	2/9/01	12.24	4.68	7.56
	3/7/01		4.09	8.15
	4/6/01		4.43	7.81
	5/7/01		4.85	7.39
	6/7/01		5.19	7.05
	7/16/01		5.36	6.88
	8/6/01		5.55	6.69
	9/6/01		5.65	6.59
	10/5/01		5.74	6.5
	11/6/01		5.67	6.57
	12/6/01		3.78	8.46
	2/8/02		2.63	9.61
	3/6/02		2.77	9.47
	6/7/02		4.06	8.18
	9/10/02		5.11	7.13
	12/27/02		2.79	9.45
	3/4/03		2.08	10.16
	6/11/03		2.97	9.27

Table A-3
Historic Groundwater Elevation Data, Quarterly Sampling
Simpson Samoa Former AST Site, Samoa, California

Sample Location	Sample Date	Top of Casing Elevation (feet MSL)[1]	Depth to Water[2] (feet)	Groundwater Elevation (feet MSL)
MW-4 (cont'd)	9/8/03		4.09	8.15
	3/2/04		2.01	10.23
	9/1/04		4.91	7.33
	3/4/05		2.98	9.26
	8/30/05		4.37	7.87
MW-5	2/9/01	11.98	3.31	8.67
	3/7/01		3.38	8.6
	4/6/01		3.63	8.35
	5/7/01		4.19	7.79
	6/7/01		4.6	7.38
	7/16/01		4.83	7.15
	8/6/01		4.99	6.99
	9/6/01		5.17	6.81
	10/5/01		5.28	6.7
	11/6/01		5.05	6.93
	12/6/01		3.14	8.84
	2/8/02		3.03	8.95
	3/6/02		3.07	8.91
	6/7/02		3.64	8.34
	9/10/02		4.5	7.48
	12/27/02		2.35	9.63
	3/4/03		3.02	8.96
	6/11/03		3.3	8.68
	9/8/03		3.75	8.23
	3/2/04		3.04	8.94
	9/1/04		4.33	7.65
	3/4/05		3.07	8.91
	8/30/05		3.86	8.12

1. MSL: Mean Sea Level
2. Below top of casing
3. NM: Not Measured
4. NA: Not Applicable

Table A-4
Historic DO, DCO_2, and ORP Measurement Results
Simpson Samoa Former AST Site, Samoa, California

Sample Location	Sample Date	DO[1] (ppm)[2]	DCO_2 [3] (ppm)	ORP[4] (mV)[5]
MW-1	3/7/01	0.64	170	77
	6/7/01	0.37	150	108
	9/6/01	0.18	140	162
	12/6/01	0.42	130	47
	3/6/02	0.28	150	99
	9/10/02	0.27	120	179
	3/4/03	0.53	100	236
	6/11/03	0.42	130	249
	9/8/03	0.63	150	257
	3/2/04	0.63	70	287
	9/1/04	0.51	120	8
	3/4/05	0.74	150	72
	8/30/05	1.23	200	-42
MW-2	3/7/01	0.37	170	-6
	6/7/01	0.08	225	10
	9/6/01	0.11	200	84
	12/6/01	NM[6]	NM	NM
	3/6/02	NM	NM	NM
	9/10/02	NM	147	250
	3/4/03	1.13	180	218
Well MW-2 Destroyed 6/2/03				
MW-3	3/7/01	0.72	150	-7
	6/7/01	0.45	230	2
	9/6/01	0.18	200	67
	12/6/01	0.42	120	11
	3/6/02	0.48	150	83
	6/7/02	0.69	200	80
	9/10/02	0.78	160	145
	12/27/02	0.91	170	233
	3/4/03	0.55	170	246
	6/11/03	0.43	140	229
	9/8/03	0.39	130	236
	3/2/04	0.75	100	274
	9/1/04	1.11	120	-112
	3/4/05	0.9	100	0
	8/30/05	1.64	90	-110

Table A-4
Historic DO, DCO_2, and ORP Measurement Results
Simpson Samoa Former AST Site, Samoa, California

Sample Location	Sample Date	DO[1] (ppm)[2]	DCO_2 [3] (ppm)	ORP[4] (mV)[5]
MW-4	3/7/01	0.41	120	2
	6/7/01	0.12	160	13
	9/6/01	0.1	120	62
	12/6/01	0.32	120	66
	3/6/02	0.24	170	95
	9/10/02	0.22	80	137
	3/4/03	0.45	150	217
	6/11/03	0.31	90	231
	9/8/03	0.7	120	222
	3/2/04	0.66	150	281
	9/1/04	1.04	70	-62
	3/4/05	1.12	90	-30
	8/30/05	0.76	80	-100
MW-5	3/7/01	0.45	60	-23
	6/7/01	0.07	100	-45
	9/6/01	0.13	60	36
	12/6/01	0.32	80	10
	3/6/02	0.32	100	75
	9/10/02	0.23	60	140
	3/4/03	0.63	90	228
	6/11/03	0.32	80	241
	9/8/03	0.3	80	224
	9/1/04	0.48	40	-77
	3/4/05	0.77	80	57
	8/30/05	0.77	50	-100

1. DO: Dissolved Oxygen, field measured using portable instrumentation.
2. ppm: Measurement concentration, in parts per million.
3. DCO_2: Dissolved Carbon Dioxide, field measured using a field test kit.
4. ORP: Oxidation-Reduction Potential measured using portable instrumentation.
5. mV: millivolts
6. NM: Not measured

Table A-5
Historic Monitoring Well MW-2 Free Product Recovery Data
Simpson Samoa Former AST Site, Samoa, California

Date	Depth to Free Product (feet)	Depth to Water (feet)	Free Product Thickness (feet)	Free Product Recovered (gallons)	Groundwater Recovered (gallons)	Total Fluid Recoverd (gallons)
11/6/01	5.6	9.43	3.83	0	0	0.00
11/29/01	4.55	9.45	4.90[1]	1	4.5	5.50
12/6/01	4.62	6.57	1.95	0.25	2.75	3.00
1/10/02	2.92	3.04	0.11	NR[2]	NR	NR
1/16/02	3.53	3.56	0.03	INS[3]	2	2.00
1/18/02	3.53	3.55	0.02	INS	2	2.00
1/21/02	3.43	3.44	0.01	INS	2	2.00
1/23/02	NA[4]	3.17	0	0	1	1.00
1/25/02	NA	3.29	0	0	1	1.00
2/8/02	NA	3.08	0	0	0	0.00
3/6/02	3.12	3.13	0.01	INS	2	2.00
4/17/02	NA	3.37	0	0	0.25	0.25
5/17/02	4.11	4.12	0.01	INS	2	2.00
6/7/02	4.38	4.38	<0.01[5]	INS	2	2.00
9/10/02	5.51	5.51	0	INS	1	4.80
12/27/02	3.75	3.76	0.01	INS	4	4.00
3/4/03	2.22	2.22	0	0	6.25	6.25
Well MW-2 Destroyed						

1. Product thickness recovered to 1.79 feet after 24 hours
2. NR: Not recorded
3. INS: Insufficient product for measurement
4. NA: Not applicable, no product present
5. <: Denotes "less than"

Appendix B

Field Notes

CONSULTING ENGINEERS & GEOLOGISTS, INC.
480 Hemsted Drive • Redding, CA 96002• Tel: 530.221.5424 • FAX: 530.221.0135 •E-mail: shninfo@shn-redding.com
812 W. Wabash • Eureka, CA 95501 • Tel: 707.441.8855 • FAX: 707.441.8877 •E-mail: shninfo@shn-engr.com

DAILY FIELD REPORT

JOB NO 000060
Page 1 of 3

PROJECT NAME	CLIENT/OWNER	DAILY FIELD REPORT SEQUENCE NO
Simpson Samoa AST	Simpson Samoa Corporation	1
GENERAL LOCATION OF WORK: Samoa, CA	OWNER/CLIENT REPRESENTATIVE: Rob Ricci	DATE: 8-30-05 / DAY OF WEEK: Tuesday
TYPE OF WORK: Semi-annual sampling	WEATHER: Foggy to clear	PROJECT ENGINEER/ SUPERVISOR: Frans Lowman
SOURCE & DESCRIPTION OF FILL MATERIAL	KEY PERSONS CONTACTED	TECHNICIAN: David R. Paine

DESCRIBE EQUIPMENT USED FOR HAULING, SPREADING, WATERING, CONDITIONING, & COMPACTING

0836	ARRIVED at site, removed lids and caps on all 4 wells.
0837	I started taking water level readings decoming the sander after each well by scrubbing it with liquinox then rinsing it with DI water.
0917	I started taking D.O readings.
0950	I started purging mw-5 with a disposable bailer, purge water was caught in a graduated 5 gal. bucket.
1015	I started purging mw-1 with a disposable bailer, purge water was caught in a graduated 5 gal. bucket.
1050	I sampled mw-5, secured well with cap and lid.
1058	I started purging mw-3 with a disposable bailer, purge water was caught in a graduated 5 gal. bucket.
1120	I sampled mw-1, secured well with cap and lid.
1127	I started purging mw-4 with a disposable bailer, purge water was caught in a graduated 5 gal. bucket.
1155	I sampled mw-3 secured well with cap and lid.
1205	I sampled mw-4, secured well with cap and lid.
1219	OFF SITE
Note:	All decon water and purge water was caught in 5 gal. buckets with lids then transported to SHN's 1,000 gal. PWST located at 812 W. Wabash Avenue Eureka, CA 27 gallons total.

COPY GIVEN TO:

REPORTED BY: David R. Paine

CONSULTING ENGINEERS & GEOLOGISTS, INC.
812 W. Wabash • Eureka, CA 95501-2138 • 707/441-8855 • FAX: 707/441-8877 • shninfo@shn-engr.com

Groundwater Elevations

Job No.: 000060 Name: David R. Paine

Client: SIMPSON SAMOA CORPORATION Date: 8-30-05

Location: SAMOA,CA Weather: Foggy to semi-clear

Sample Location	Time of Reading	Top of Casing Elevation (feet)	Depth To Water (feet)	Water Surface Elevation (feet)
MW-1	0900	14.74	6.52	8.22
MW-3	0903	12.54	4.57	7.97
MW-4	0905	12.24	4.37	7.87
MW-5	0857	11.98	3.86	8.12

CONSULTING ENGINEERS & GEOLOGISTS, INC.
812 W. Wabash • Eureka, CA 95501-2138 • 707/441-8855 • FAX: 707/441-8877 • shninfo@shn-engr.com

EQUIPMENT CALIBRATION SHEET

Name: David R. Paine

Project Name: Simpson Samoa AST

Reference No.: 000060

Date: 8-30-05

Equipment: ☒ pH & EC ☐ PID ☐ $GTCO_2$ ☐ GTLEL
☐ Turbidity ☒ Other Dissolved Oxygen Meter YSI95

Description of Calibration Procedure and Results:

pH eEc meter is calibrated using a 2 buffer method with 7.01 and 4.01, the Ec (conductivity) is set at 1413 µS.

DO meter is self calibrating with the Altimeter set at 0.

SHN CONSULTING ENGINEERS & GEOLOGISTS, INC.
812 W. Wabash • Eureka, CA 95501-2138 • 707/441-8855 • FAX: 707/441-8877 •shninfo@shn-engr.com

Water Sampling Data Sheet

Project Name: Simpson Samoa
Project No.: 000060
Location: Samoa, CA
Well #: MW-5
Hydrocarbon Thickness/Depth (feet): NA

Date/Time: 8-30-05
Sampler Name: David P. Palm
Sample Type: Ground water
Weather: Foggy to clear
Key Needed: YES Dolphin

Total Well Depth (feet)	-	Initial Depth to Water (feet)	=	Height of Water Column (feet)	x	0.163 gal/ft (2-inch well) / 0.653 gal/ft (4-inch well)	=	1 Casing Volume (gal)
15.20	-	3.86	=	11.34	x	0.163	=	1.85

Time	DO (ppm)	CO_2 (ppm)	ORP (mV)	EC (uS/cm)	Temp (°F)	pH	Water Removed (gal)	Comments
0922	0.77						0 gal	
0950	↓	50	-100				0.25 gal	
0958	↓			463	66.3°	6.77	2 gal.	
1004	No Flow			465	66.5°	6.80	3.75 gal.	
1009	then cell			469	66°	6.81	5.25 gal.	
1050	Sample Time							

Purge Method: Hand Bail
Total Volume Removed: 5.75 (gal)

Laboratory Information

Sample ID	# & Type of Containers	Preservative / Type	Laboratory	Analyses
MW-5	2-60ml VOAs	None	NCL	TPHD

Well Condition: Good
Remarks: Recharged to 3.86 at sample Time

CONSULTING ENGINEERS & GEOLOGISTS, INC.
812 W. Wabash • Eureka, CA 95501-2138 • 707/441-8855 • FAX: 707/441-8877 •shninfo@shn-engr.com

Water Sampling Data Sheet

Project Name: Simpson Samoa
Project No.: 000060
Location: Samoa, CA
Well #: MW-1
Hydrocarbon Thickness/Depth (feet): NM

Date/Time: 8-30-05
Sampler Name: David P. Palmer
Sample Type: Ground water
Weather: Foggy to clear
Key Needed: YES Dolphin

Total Well Depth (feet)	-	Initial Depth to Water (feet)	=	Height of Water Column (feet)	x	0.163 gal/ft (2-inch well) / 0.653 gal/ft (4-inch well)	=	1 Casing Volume (gal)
15.00	-	6.52	=	8.48	x	0.163	=	1.38

Time	DO (ppm)	CO_2 (ppm)	ORP (mV)	EC (uS/cm)	Temp (°F)	pH	Water Removed (gal)	Comments
0929	1.23						0 gal	
1015	↓	200	-42				0.25 gal	
1025	↓			386	65.6°	6.10	1.50 gal.	
1030	No Flow			422	64.6°	6.21	2.75 gal.	
1035	then cell			376	63.9°	6.18	4.0 gal.	
1039				365	63.7°	6.14	5.50 gal.	
1045				361	64.1°	6.11	7 gal.	
1120	Sample Time							

Purge Method: Hand Bail
Total Volume Removed: 7.00 (gal)

Laboratory Information

Sample ID	# & Type of Containers	Preservative / Type	Laboratory	Analyses
MW-1	2-60ml VOA's	None	NCL	TPHD

Well Condition: Good
Remarks: Recharged to 6.50 at sample Time

CONSULTING ENGINEERS & GEOLOGISTS, INC.
812 W. Wabash • Eureka, CA 95501-2138 • 707/441-8855 • FAX: 707/441-8877 • shninfo@shn-engr.com

Water Sampling Data Sheet

Project Name: Simpson Samoa
Project No.: 000060
Location: Samoa, CA
Well #: MW-3
Hydrocarbon Thickness/Depth (feet): NA

Date/Time: 8-30-05
Sampler Name: David R. Pain
Sample Type: Ground water
Weather: Foggy to clear
Key Needed: YES Dolphin

Total Well Depth (feet)	-	Initial Depth to Water (feet)	=	Height of Water Column (feet)	x	0.163 gal/ft (2-inch well) / 0.653 gal/ft (4-inch well)	=	1 Casing Volume (gal)
14.60	-	4.57	=	10.03	x	0.163	=	1.63

Time	DO (ppm)	CO_2 (ppm)	ORP (mV)	EC (uS/cm)	Temp (°F)	pH	Water Removed (gal)	Comments
0936	1.64						0 gal	
1058	↓	90	~110				0.25 gal	
1106	↓			576	66.8°	6.51	1.25 gal	
1110	No Flow			585	66.8°	6.52	3.25 gal	
1114	then cell			594	66.8°	6.57	5 gal	
1155	Sample Time							

Purge Method: Hand Bail
Total Volume Removed: 5.00 (gal)

Laboratory Information

Sample ID	# & Type of Containers	Preservative / Type	Laboratory	Analyses
MW-3	2-60ml VOA's	None	NCL	TPHD

Well Condition: Good
Remarks: Recharged to 4.50 at sample Time

SHN CONSULTING ENGINEERS & GEOLOGISTS, INC.
812 W. Wabash • Eureka, CA 95501-2138 • 707/441-8855 • FAX: 707/441-8877 • shninfo@shn-engr.com

Water Sampling Data Sheet

Project Name: Simpson Samoa
Project No.: 000060
Location: Samoa, CA
Well #: MW-4
Hydrocarbon Thickness/Depth (feet): NA

Date/Time: 8-30-05
Sampler Name: David P. Palmer
Sample Type: Ground water
Weather: Foggy to clear
Key Needed: YES Dolphin

Total Well Depth (feet)	-	Initial Depth to Water (feet)	=	Height of Water Column (feet)	x	0.163 gal/ft (2-inch well) / 0.653 gal/ft (4-inch well)	=	1 Casing Volume (gal)
15.25	-	4.37	=	10.88	x	0.163	=	1.77

Time	DO (ppm)	CO_2 (ppm)	ORP (mV)	EC (uS/cm)	Temp (°F)	pH	Water Removed (gal)	Comments
0942	0.76						0 gal	
1129	↓	80	-100				0.25 gal	
1137	↓			743	65.7°	6.54	2 gal	
1142	No Flow			755	65.1°	6.61	3.75 gal	
1147	thru cell			768	65°	6.58	5.50 gal.	
1205	Sample Time							

Purge Method: Hand Bail
Total Volume Removed: 5.50 (gal)

Laboratory Information

Sample ID	# & Type of Containers	Preservative / Type	Laboratory	Analyses
MW-4	2-60ml VOA's	None	NCL	TPHD

Well Condition: Good
Remarks: Recharged to 4.29 at sample Time

Client Name: **SIMPSON SAMOA AST**

The water from your site: **1 JIM SMITH DRIVE SAMOA, CA**
RWQCB CASE # 1NHU764

SHN ref # **000060** Collected On: **3/4/05**

Has been tested and certified as acceptable to be discharged into the City of Eureka municipal sewer system.

Amount Discharged: **26 GALLONS**

Date Discharged: **4/29/05**

Certified by: **DAVID R. PAINE**

SHN CONSULTING ENGINEERS & GEOLOGISTS, INC.
City of Eureka Wastewater Discharge Permit #65

Appendix C

Laboratory Analytical Report

NORTH COAST LABORATORIES LTD.

September 02, 2005

Simpson Timber Company
P.O. Box 1089
Arcata, CA 95518

Attn: Rob Ricci

RE: 000060, Simpson Samoa AST

Order No.: 0508821
Invoice No.: 52541
PO No.: 1079-04-AD-0
ELAP No. 1247-Expires July 2006

SAMPLE IDENTIFICATION

Fraction	Client Sample Description
01A	MW-5
02A	MW-1
03A	MW-3
04A	MW-4

ND = Not Detected at the Reporting Limit

Limit = Reporting Limit

All solid results are expressed on a wet-weight basis unless otherwise noted.

REPORT CERTIFIED BY

Laboratory Supervisor(s) | QA Unit | Jesse G. Chaney, Jr. Laboratory Director

5680 West End Road • Arcata California 95521-9202 • 707-822-4649 • FAX 707-822-6831

North Coast Laboratories, Ltd. **Date:** *02-Sep-05*

CLIENT: Simpson Timber Company
Project: 000060, Simpson Samoa AST
Lab Order: 0508821

CASE NARRATIVE

TPH as Diesel:
Samples MW-1, MW-3 and MW-4 contain material similar to degraded or weathered diesel oil.

NORTH COAST LABORATORIES
5680 West End Road • Arcata, California 95521-9202 • 707-822-4649 • FAX 707-822-6831

Date: 02-Sep-05
WorkOrder: 0508821

ANALYTICAL REPORT

Client Sample ID: MW-5 **Received:** 8/30/05 **Collected:** 8/30/05 10:50
Lab ID: 0508821-01A

Test Name: TPH as Diesel **Reference:** EPA 3510/GCFID(LUFT)/EPA 8015B

Parameter	Result	Limit	Units	DF	Extracted	Analyzed
TPHC Diesel (C12-C22)	ND	50	µg/L	1.0	8/31/05	9/1/05
Surrogate: N-Tricosane	77.4	70-130	% Rec	1.0	8/31/05	9/1/05

Client Sample ID: MW-1 **Received:** 8/30/05 **Collected:** 8/30/05 11:20
Lab ID: 0508821-02A

Test Name: TPH as Diesel **Reference:** EPA 3510/GCFID(LUFT)/EPA 8015B

Parameter	Result	Limit	Units	DF	Extracted	Analyzed
TPHC Diesel (C12-C22)	68	50	µg/L	1.0	8/31/05	9/1/05
Surrogate: N-Tricosane	82.6	70-130	% Rec	1.0	8/31/05	9/1/05

Client Sample ID: MW-3 **Received:** 8/30/05 **Collected:** 8/30/05 11:55
Lab ID: 0508821-03A

Test Name: TPH as Diesel **Reference:** EPA 3510/GCFID(LUFT)/EPA 8015B

Parameter	Result	Limit	Units	DF	Extracted	Analyzed
TPHC Diesel (C12-C22)	1,200	50	µg/L	1.0	8/31/05	9/1/05
Surrogate: N-Tricosane	103	70-130	% Rec	1.0	8/31/05	9/1/05

Client Sample ID: MW-4 **Received:** 8/30/05 **Collected:** 8/30/05 12:05
Lab ID: 0508821-04A

Test Name: TPH as Diesel **Reference:** EPA 3510/GCFID(LUFT)/EPA 8015B

Parameter	Result	Limit	Units	DF	Extracted	Analyzed
TPHC Diesel (C12-C22)	380	50	µg/L	1.0	8/31/05	9/1/05
Surrogate: N-Tricosane	87.1	70-130	% Rec	1.0	8/31/05	9/1/05

NORTH COAST LABORATORIES
5680 West End Road • Arcata, California 95521-9202 • 707-822-4649 • FAX 707-822-6831

North Coast Laboratories, Ltd.

Date: 02-Sep-05

CLIENT: Simpson Timber Company
Work Order: 0508821
Project: 000060, Simpson Samoa AST

QC SUMMARY REPORT
Method Blank

Sample ID: **MB-14136** Batch ID: **14136** Test Code: **TPHDIW** Units: **µg/L** Analysis Date: **9/1/05 1:48:47 AM** Prep Date: **8/31/05**
Client ID: Run ID: **ORGC7_050831A** SeqNo: **528170**

Analyte	Result	Limit	SPK value	SPK Ref Val	% Rec	LowLimit	HighLimit	RPD Ref Val	%RPD	RPDLimit	Qual
TPHC Diesel (C12-C22)	ND	50									
N-Tricosane	35.7	0.10	50.0	0	71.5%	70	130	0			

Qualifiers:
ND - Not Detected at the Reporting Limit
J - Analyte detected below quantitation limits
S - Spike Recovery outside accepted recovery limits
R - RPD outside accepted recovery limits
B - Analyte detected in the associated Method Blank

North Coast Laboratories, Ltd.

Date: 02-Sep-05

CLIENT: Simpson Timber Company
Work Order: 0508821
Project: 000060, Simpson Samoa AST

QC SUMMARY REPORT
Laboratory Control Spike

Sample ID: **LCS-14136** Batch ID: **14136** Test Code: **TPHDIW** Units: **µg/L** Analysis Date: **8/31/05 11:47:28 PM** Prep Date: **8/31/05**
Client ID: Run ID: **ORGC7_050831A** SeqNo: **528167**

Analyte	Result	Limit	SPK value	SPK Ref Val	% Rec	LowLimit	HighLimit	RPD Ref Val	%RPD	RPDLimit	Qual
TPHC Diesel (C12-C22)	569.0	50	500	0	114%	67	120	0			
N-Tricosane	43.7	0.10	50.0	0	87.4%	70	130	0			

Sample ID: **LCSD-14136** Batch ID: **14136** Test Code: **TPHDIW** Units: **µg/L** Analysis Date: **9/1/05 12:07:35 AM** Prep Date: **8/31/05**
Client ID: Run ID: **ORGC7_050831A** SeqNo: **528168**

Analyte	Result	Limit	SPK value	SPK Ref Val	% Rec	LowLimit	HighLimit	RPD Ref Val	%RPD	RPDLimit	Qual
TPHC Diesel (C12-C22)	583.9	50	500	0	117%	67	120	569	2.59%	15	
N-Tricosane	42.6	0.10	50.0	0	85.2%	70	130	43.7	2.55%	15	

Qualifiers:
ND - Not Detected at the Reporting Limit
J - Analyte detected below quantitation limits
S - Spike Recovery outside accepted recovery limits
R - RPD outside accepted recovery limits
B - Analyte detected in the associated Method Blank

NORTH COAST LABORATORIES LTD.
5680 West End Road • Arcata • CA 95521-9202
707-822-4649 Fax 707-822-6831

Chain of Custody

LABORATORY NUMBER: 0708821

Attention: Rob Ricci
Results & Invoice to: Simpson Timber Company
Address: P.O. Box 1089
Arcata, CA 95518
Phone: 268-3000
Copies of Report to: SHN Frans Lowman
812 W. Wabash Ave. Eureka, CA 95501
Sampler (Sign & Print): David R. Paine David R. Paine

TAT: ☐ 24 Hr ☐ 48 Hr ☐ 5 Day ☐ 5–7 Day
☒ STD (2–3 Wk) ☐ Other: _____
PRIOR AUTHORIZATION IS REQUIRED FOR RUSHES

REPORTING REQUIREMENTS: State Forms ☐
Preliminary: FAX ☐ Verbal ☐ By: __/__/__
Final Report: FAX ☐ Verbal ☐ By: __/__/__

PROJECT INFORMATION
Project Number: 000060
Project Name: Simpson Somoa AST
Purchase Order Number: _____

LAB ID	SAMPLE ID	DATE	TIME	MATRIX*	PRESERVATIVE	CONTAINER	ANALYSIS: TPHD
	MW-5	8/30/05	1050	GW		14	X
	MW-1	"	1120	"			X
	MW-3	"	1155	"			X
	MW-4	↓	1205	↓			X

CONTAINER CODES: 1—½ gal. pl; 2—250 ml pl; 3—500 ml pl; 4—1 L Nalgene; 5—250 ml BG; 6—500 ml BG; 7—1 L BG; 8—1 L cg; 9—40 ml VOA; 10—125 ml VOA; 11—4 oz glass jar; 12—8 oz glass jar; 13—brass tube; 14—other

PRESERVATIVE CODES: a—HNO_3; b—HCl; c—H_2SO_4; d—$Na_2S_2O_3$; e—NaOH; f—$C_2H_3O_2Cl$; g—other

SAMPLE CONDITION/SPECIAL INSTRUCTIONS
EDF
Global ID# T0602393498

RELINQUISHED BY (Sign & Print)	DATE/TIME	RECEIVED BY (Sign)	DATE/TIME
David R. Paine David R. Paine	8/30/05 1245	[signature]	8-30-05 1245

SAMPLE DISPOSAL
☒ NCL Disposal of Non-Contaminated
☐ Return ☐ Pickup

CHAIN OF CUSTODY SEALS Y/N/NA
SHIPPED VIA: UPS Air-Ex Fed-Ex Bus (Hand)

***MATRIX:** DW=Drinking Water; Eff=Effluent; Inf=Influent; SW=Surface Water; GW=Ground Water; S=Soil; O=Other.

ALL CONTAMINATED NON-AQUEOUS SAMPLES WILL BE RETURNED TO CLIENT