LOCATION MAP

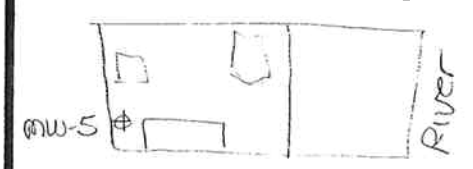

NORTHING EASTING ELEVATION

\CIFIC ENVIRONMENTAL GR P, INC.

WELL/BORING NO. MW-5
PAGE 1 OF 1

PROJECT NO. 305-30.01
LOGGED BY: MF
DRILLER: All Terraine
DRILLING METHOD: HSA
SAMPLING METHOD: Cal. Mod
CASING TYPE: Sch. 40 PVC
SLOT SIZE: 0.02-inch
GRAVEL PACK: 2x12 Lonestar

CLIENT: Shell
DATE DRILLED: 12-11-91
LOCATION: Eureka
HOLE DIAMETER: 12 inches
HOLE DEPTH: 20 feet
WELL DIAMETER: 4 inches
WELL DEPTH: 17.5 feet
CASING STICKUP: —

WELL COMPLETION		MOISTURE CONTENT	PID	PENETRATION (BLOWS/6")	DEPTH (FEET)	RECOVERY	SAMPLE INTERVAL	GRAPHIC	SOIL TYPE	LITHOLOGY / REMARKS
Cement					1				SM	SAND; yellow brown; trace-10% clay; 20-30% silt; 65-75% fine sand; NPO
					2				OH	CLAY; organic; black;
		(2.5')							SM	
		(4:30)			3					SAND; Dk. blue grey; trace clay; 10-20% silt; 75-85% fine sand; trace-10% organics (roots, wood); SPO
					4					
				P U	5					
		WET	50	O H	6					(Flowing Sand)
					7					
					8					
					9					
				P U S H	10				SC	CLAYEY SAND; Dk. greenish grey; 10-20% clay; 25-35% silt; 50-60% fine sand; FPO-MPO
		WET	O		11					
					12					
					13					
					14				SM	
				P U S H	15					SAND; Dk. blue grey; trace clay; 10-20% silt; 80-90% fine sand; FPO-MPO (Bag sample only)
		WET	O		16					
					17					(Flowing Sand)
					18					
				2 4 10	19					@19': Medium dense; NPO-FPO
		WET	O	20	20					
										Bottom of Hole @ 20 feet

Cement

Bentonite

SAND